



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL MINI 4W/10 /10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.


Product data

General Information		Approval and Application	
Cap base	G5 [G5]	Mercury (Hg) content (nom.)	4.4 mg
Life to 50% failures (nom.)	8000 h		
Useful life (max.)	5000 h		
Light Technical		UV	
Colour code	10	UV-B/UV-A (IEC)	0.2 %
Colour designation	Actinic		
Depreciation at 1000 Hours	25 %	Product Data	
Depreciation at 500 Hours	35 %	Full product code	871150095142727
Depreciation at 500 Hours	17 %	Order product name	Actinic BL TL MINI 4W/10
		EAN/UPC – product	8711500951427
		Order code	95142727
		Numerator – quantity per pack	1
		Numerator – packs per outer box	250
		Material no. (12NC)	928000001030
		Net weight (piece)	18.600 g
Operating and Electrical			
Power (Rated) (Nom)	4.5 W		
Lamp current (nom.)	0.17 A		
Voltage (Nom)	29 V		

Actinic BL TL(-K)/TL-D(-K)

Warnings and Safety

Dimensional drawing




Product


Actinic BL TL MINI 4W/10

TL 4W/10

Photometric data

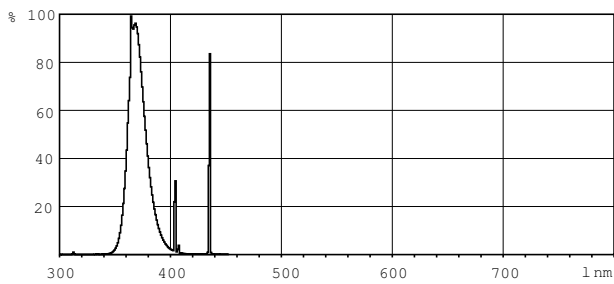

XDPB_XUBTL_10-Spectral power distribution B/W

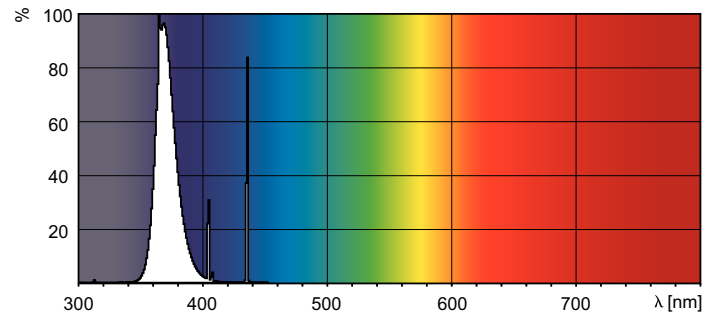

XDPO_XUBTL_10-Spectral power distribution Colour

